



[illegible]




SECTION B B

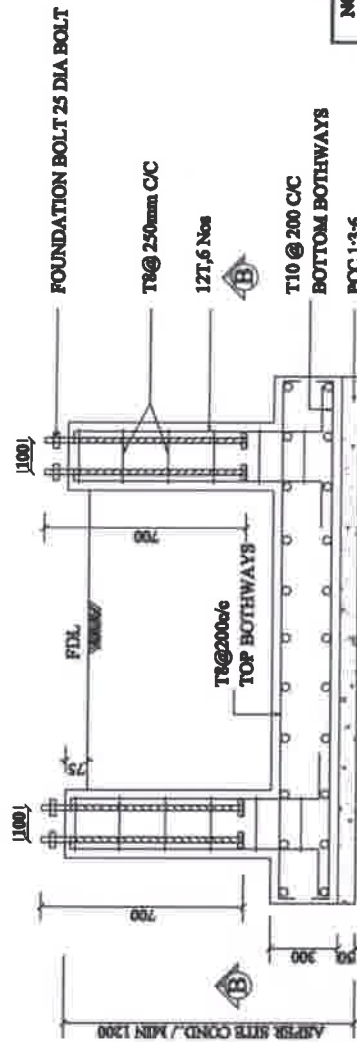

SECTION AA

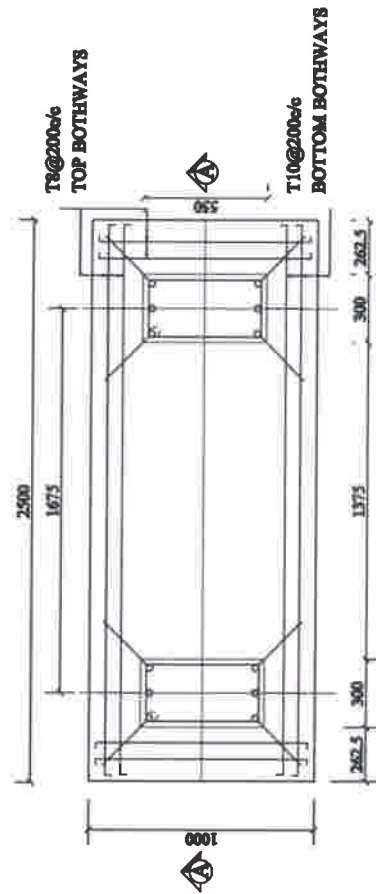

PLAN

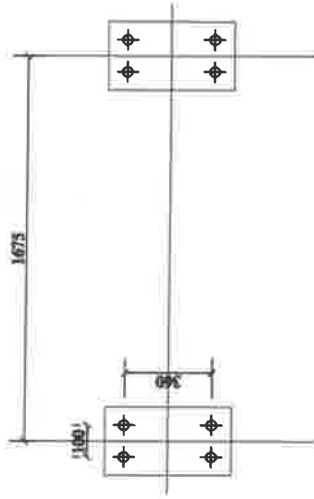

BOLT POSITION DETAIL

NOTES:-

1. USE CONCRETE MIX 1:2:4 & F_y 460 TOR STEEL UOS.
2. PROVIDE CLEAR COVER TO MAIN REINFORCEMENT
 - a. FOR FOOTING SIDES & BOTTOM 50mm
 - b. FOR PEDISTAL 40mm
3. LAP LENGTH 48 x DIA OF BAR
4. HOOK LENGTH FOR RINGS TO BE 9 x DIA
5. ALL COLUMNS SHOULD BE OF SAME LEVEL
6. # REPRESENTS TOR
7. ALL DIMENSIONS ARE IN mm UOS.
8. LOCATION AS PER SITE LAYOUT
9. FOUNDATION BOLTS 20 mm Ø X 700 mm LONG WITH NUTS & WASHERS



LANKA IOC PLC

STANDARD DRAWINGS

SCALE FTS

MAIN SIGN POLE - FOUNDATION

DRG.No - SD-MSP-02

CHECKED BY:

APPROVED BY: